

## Frame width adjuster


# Adjuster

## Taiyu Adjuster



Frame width is easy to adjust (foot-operated).

This machine incorporates functionality for checking and correcting frame width. Frame width can be checked and corrected with the touch of a single button.


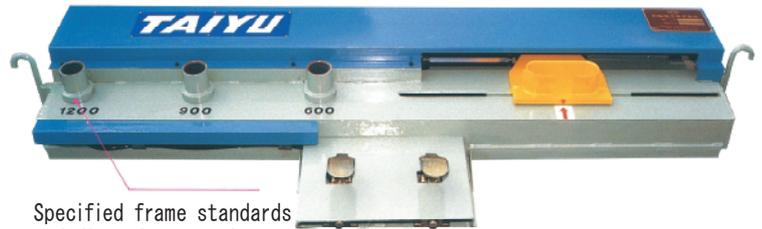


Specified frame standards and dimensions may be customized upon request.

### ■Main specifications

Power source	Compressed air
Specified frame	Width: 600 mm to 1,200 mm (Standards and dimensions may be modified to suit customers' products.)
Correction range	Basic dimensions±260mm
Correction precision	Basic dimensions±3mm

※Specifications are subject to change without notice.

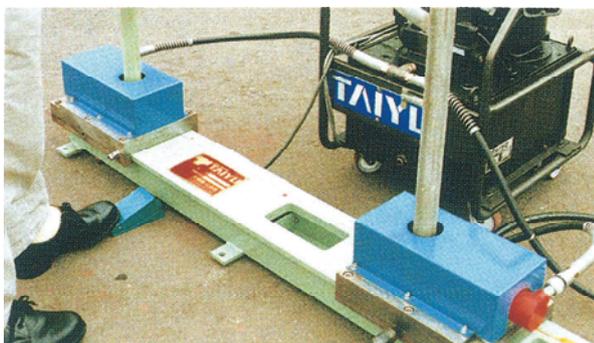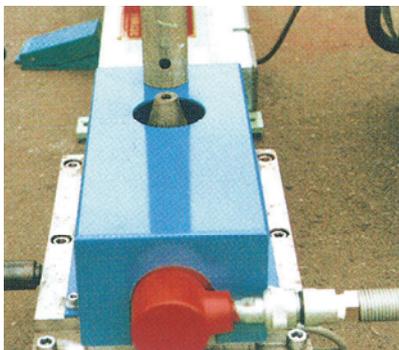

Punching is made at the touch of a button correctly. Frame width checks (width·inner diameter of pipe) are made simultaneously with punching at the touch of a button.

### ■Specified Frame

Width	600.900.1200mm(compatible with inch)	
Foot pipe	Outer Diameterφ42.7	Thickness 2.3~2.5

## Pedestal combination drilling machine

# TU POWER PUNCHER

## TU POWER PUNCHER

### ■Specifications

Power supply	200V·0.4KW
Processing capacity	3~5seconds/1 frame
Hole diameter Position	<p>notes) In the case of an order, instruct the inside or the outside of a combination hole in the direction.</p>

※Specifications are subject to change without notice.