

Frame/scaffolding combined cleaning system

MCS series MCS-I/II/III type


Multiple Cleaning System



Specifications (MCS-I type)			
		Frames	Scaffolding planks
Specified members	Width	600,760,900,or1,200mm(inch or mm)	240 to 500 mm
	Length	900 to 1,800 mm	900 to 4,000 mm
	Diameter (thickness)	φ42.7 mm	30 to 60 mm
Cleaning speed		4 m/min. to 12 m/min. (inverter-controlled)	
Dresser rotation		Inverter control	
Total electric capacity		200 V AC, 8.15 kW	

※Specifications are subject to change without notice.

Standard Layout

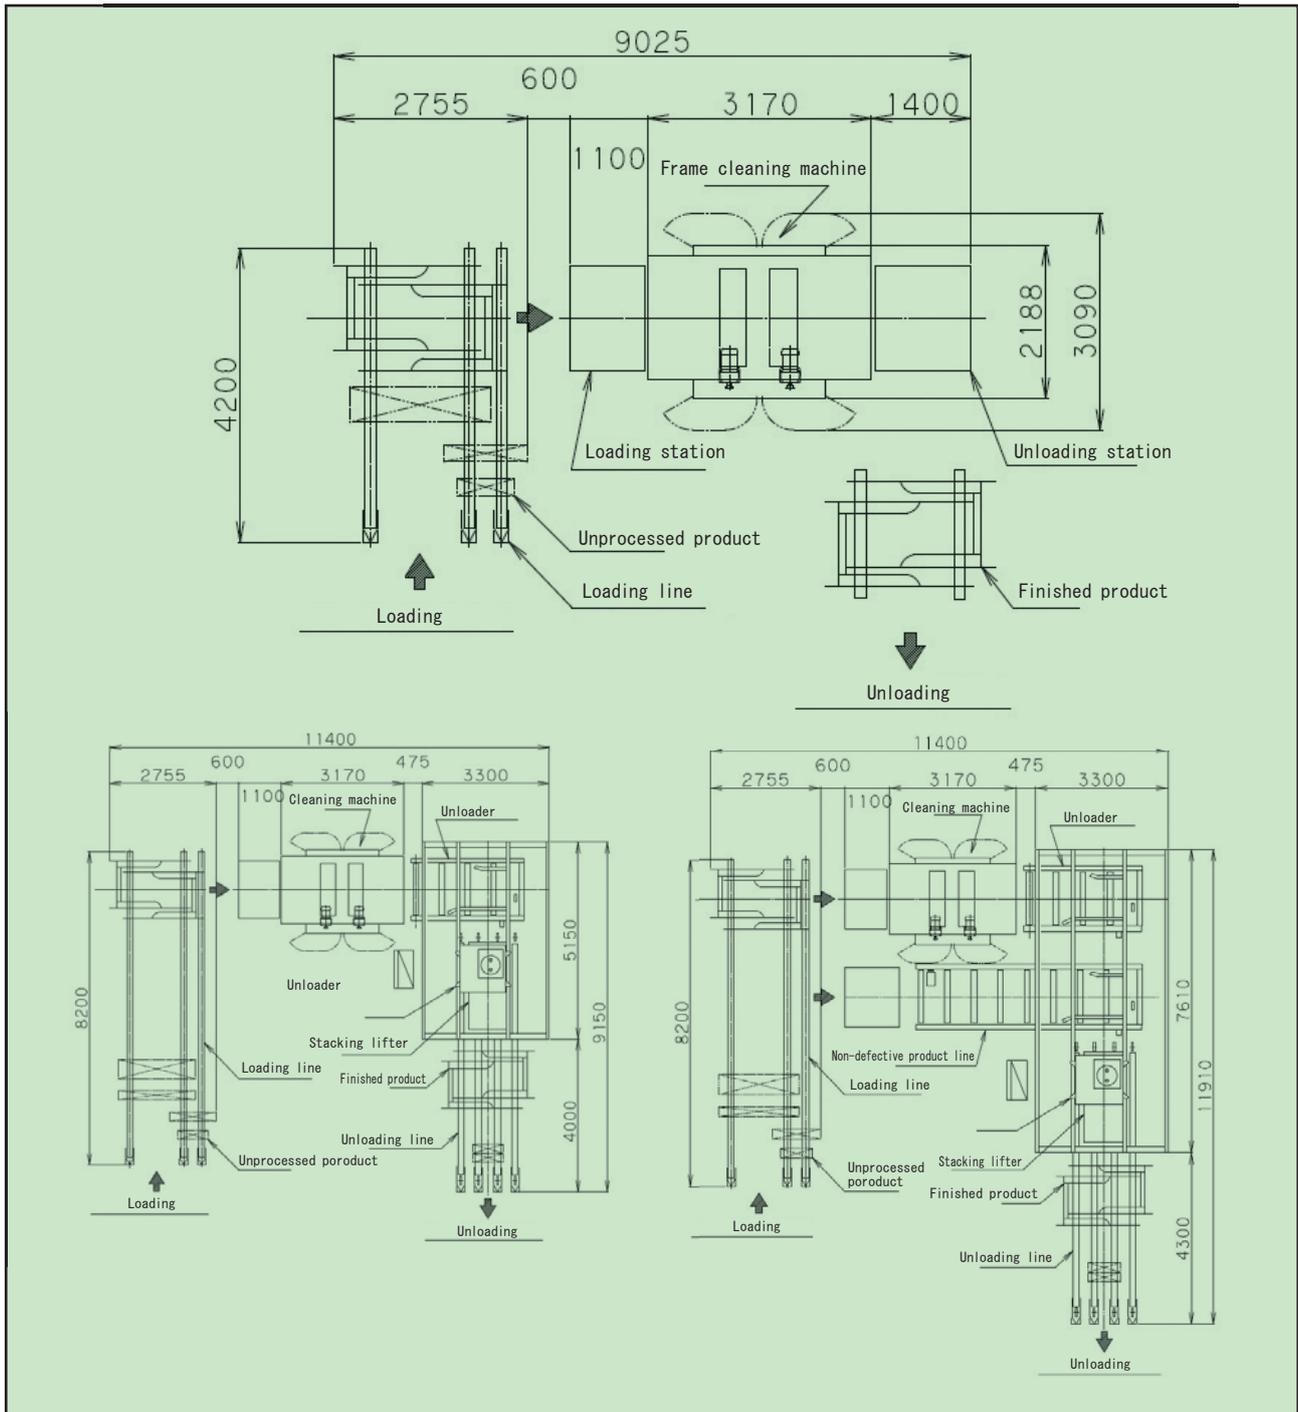

Ring-type dressers

Specially designed dressers makes it possible to clean both frames and scaffolding. There is no need to replace consumable parts over long periods of time.

